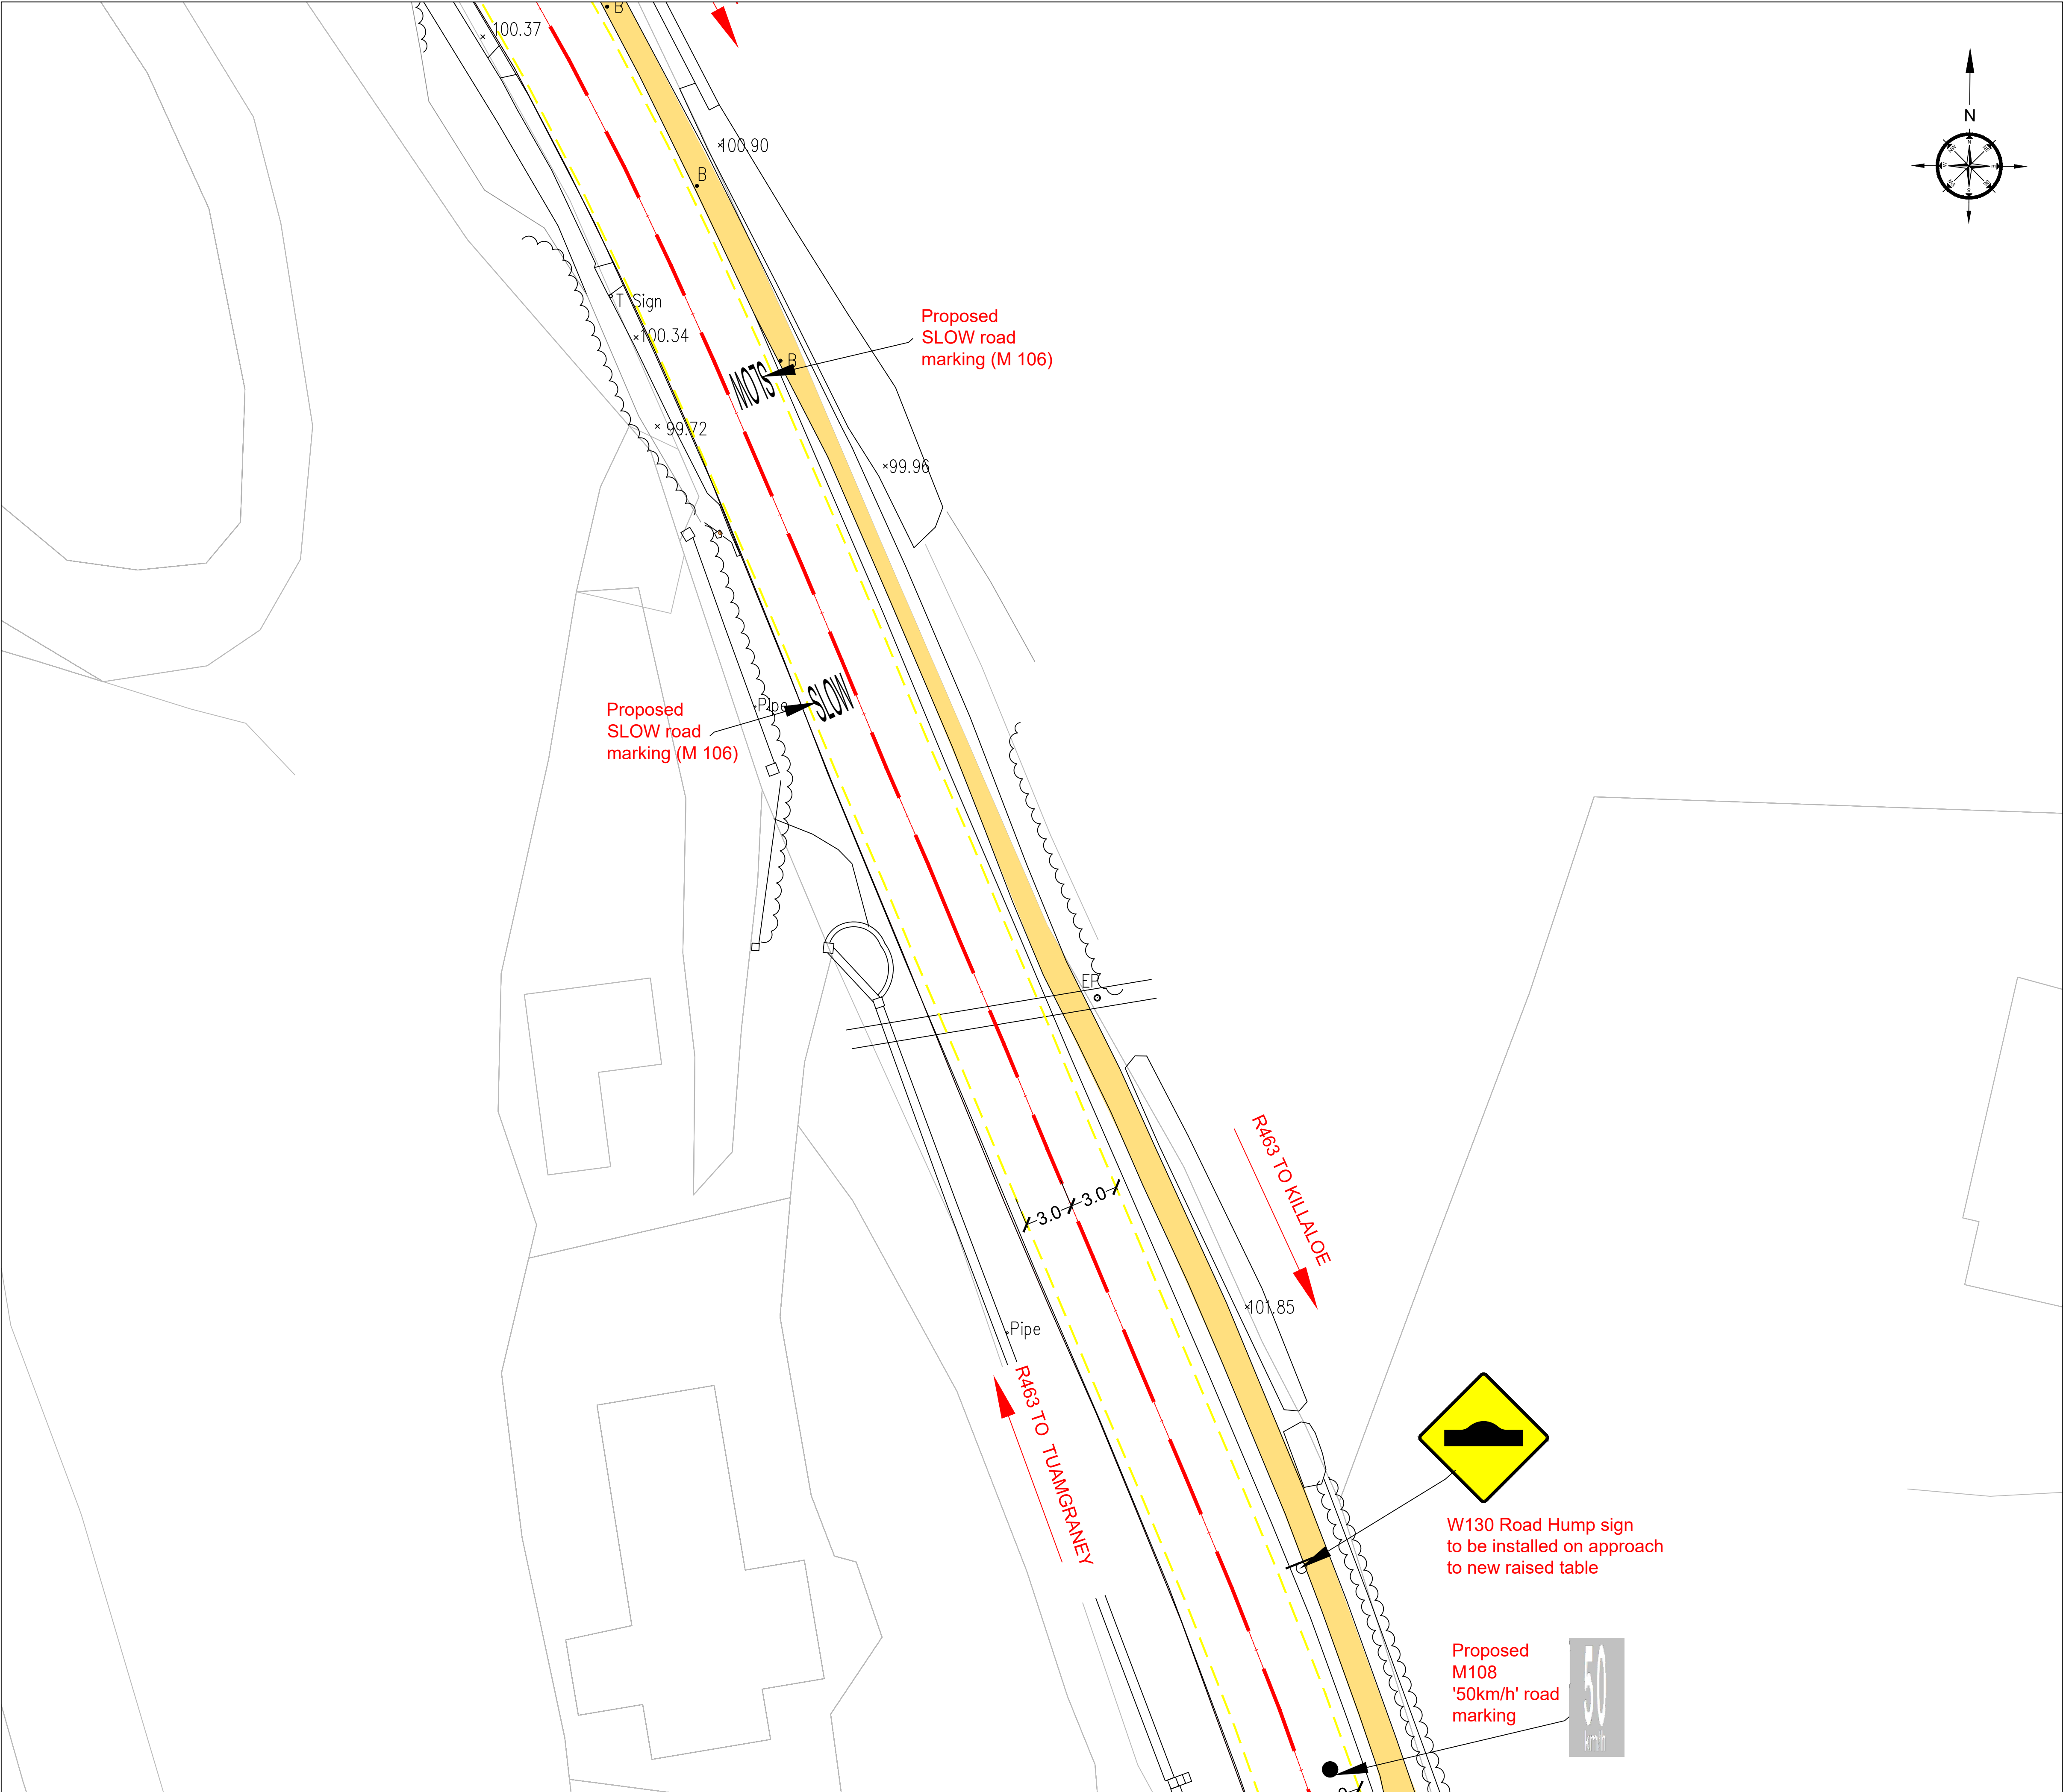


Legend

Existing kerb

Proposed new kerbing

Existing footpath

Proposed new footpath

- NOTES:
1. ALL DIMENSIONS AND LEVELS ARE IN METRES UNLESS NOTED OTHERWISE.
 2. USE FIGURED DIMENSIONS ONLY. DO NOT SCALE.
 3. DRAWINGS TO BE READ IN CONJUNCTION WITH ALL RELEVANT PROJECT BRIEFS, SPECIFICATIONS, PRICING DOCUMENTS & 'SAFE ROUTES TO SCHOOL' GUIDANCE.
 4. CONTRACTOR TO ALLOW FOR SITE SETUP, STORAGE COMPOUND & ALL ANCILLARY MEASURES NECESSARY TO CARRY OUT THE WORKS.
 5. CONTRACTOR TO UNDERTAKE ROLE OF PROJECT SUPERVISOR CONSTRUCTION STAGE (PSCS).
 6. CONTRACTOR TO MAINTAIN VEHICULAR THROUGH ACCESS ALONG ROAD AT ALL TIMES FOR THE DURATION OF THE WORKS.
 6. CONTRACTOR TO MAINTAIN PEDESTRIAN ACCESS ALONG ROADWAY FOR RESIDENTS AND SCHOOL PATRONS AT ALL TIMES FOR THE DURATION OF THE WORKS.
 7. TEMPORARY DELINEATED WALKWAYS TO BE INSTALLED BY CONTRACTOR THROUGHOUT WORKS AREA AS NECESSARY TO ENSURE PEDESTRIAN ACCESS AND SAFETY FOR DURATION OF WORKS.
 8. CONTRACTOR TO ALLOW FOR ALL TRAFFIC MANAGEMENT PLANS, ARRANGEMENTS AND OBTAINING ROAD OPENING LICENSES AS NECESSARY.
 9. CONTRACTOR TO IDENTIFY & PROTECT ALL EXISTING SERVICES WITHIN THE WORKS AREA AT OUTSET OF WORKS.
 10. EXISTING DRAINAGE INFRASTRUCTURE HAS BEEN SHOWN BASED ON AVAILABLE TOPOGRAPHICAL & OTHER SURVEY INFORMATION.
 11. ALL WORKS TO BE CARRIED OUT IN ACCORDANCE WITH CURRENT BUILDING REGULATIONS.
 12. TACTILE PAVING TO BE INSTALLED IN ACCORDANCE WITH *GUIDANCE ON THE USE OF TACTILE PAVING SURFACES* DOCUMENT.
 13. KERBS, FOOTWAYS AND PAVED AREAS TO BE IN ACCORDANCE WITH TII PUBLICATIONS *FOOTWAY DESIGN & VOLUME 1 SPECIFICATION FOR ROAD WORKS SERIES 1100 KERBS, FOOTWAYS AND PAVED AREAS*.
 14. ALL SIGNAGE AND ROAD MARKINGS TO BE IN ACCORDANCE WITH THE *TRAFFIC SIGNS MANUAL*.
 15. ROAD MARKINGS TO ALSO BE IN ACCORDANCE WITH *IS EN 1436 EUROPEAN STANDARD FOR ROAD MARKINGS*.
 16. PRECAST CONCRETE GULLEYS AND COVER SLABS SHALL BE TO IS EN 1917 OR BS 5911-6.
 17. ALL NEW / REPLACEMENT MANHOLE COVERS & GULLEY GRATES TO LOADING CLASS D400.
 18. CONTRACTOR TO ALLOW FOR CONNECTION OF ALL EXISTING & NEW ROAD GULLEYS TO EXISTING SURFACE WATER DRAINAGE PIPEWORK.
 19. CONTRACTOR TO ALLOW FOR ALTERATIONS TO EXISTING BOUNDARY BOXES, WATER METERS, HYDRANTS, SLUICE VALVES & SCOUR VALVES WITHIN WORKS AREA.
 20. CONTRACTOR TO ENSURE DUCTING FOR NEW PUBLIC LIGHTING COLUMNS TO BE INSTALLED IN ACCORDANCE WITH ELECTRICAL SPECIALIST SPECIFICATION.
 21. CONTRACTOR TO INSTALL POTS IN CONCRETE SURROUND TO SPECIALIST SPECIFICATION AT ALL LOCATIONS DENOTED ON DRAWING FOR PUBLIC LIGHTING COLUMNS.
 22. CONTRACTOR TO FACILITATE SPECIALIST IN THE INSTALLATION OF PUBLIC LIGHTING COLUMNS & ASSOCIATED ELECTRICAL WIRING WORKS.
 23. SURFACING OF FOOTPATHS TO BE CARRIED OUT AFTER COMPLETION OF ELECTRICAL WORKS.
 24. JOINTS TO BE PROVIDED IN CONCRETE FOOTPATHS TO ACCOMMODATE HORIZONTAL MOVEMENT DUE TO CHANGES IN TEMPERATURE & MOISTURE CONTENT.
 25. ON COMPLETION, CONTRACTOR TO ALLOW FOR MAKING GOOD TO ALL AREAS AFFECTED BY THE WORKS.

Revision	Description of Changes Made	By	Date



CLARE COUNTY COUNCIL

Road Design Office, Áras Contae an Chláir, New Road, Ennis, Co. Clare
T: 065 6821616 F: 065 68 21915
E: rdo@clarecoco.ie W: www.clarecoco.ie

Project Title:

SPECIFIC IMPROVEMENT SCHEME - OGONNELLOE

Drawing Title:

Proposed Site Layout

Status:	Draft	Drawing No.:	Rev:	
Designed by:	KOC	R.53.01.02.03-400		
Drawn by:	C.E.			
Checked by:	KOC			
Approved by:	AOS	Location: W:53.0 Specific Improvement Schemes (SIG)53.01 Ogonnelloe/Phase 2/53.01.02.03 Design		
Scale:	1: 200 @ A1			
Date:	05.09.2025			